



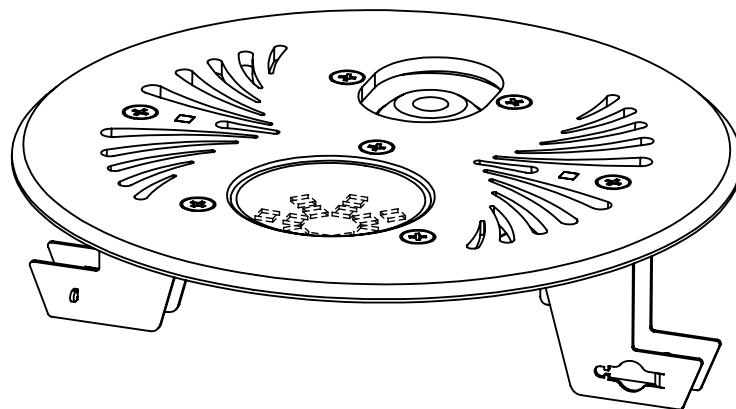


MEDIUM DRYDECK NOZZLE
(N.DD.C-M)
OPERATING INSTRUCTIONS


1- Explode Medium Drydeck Nozzle Components

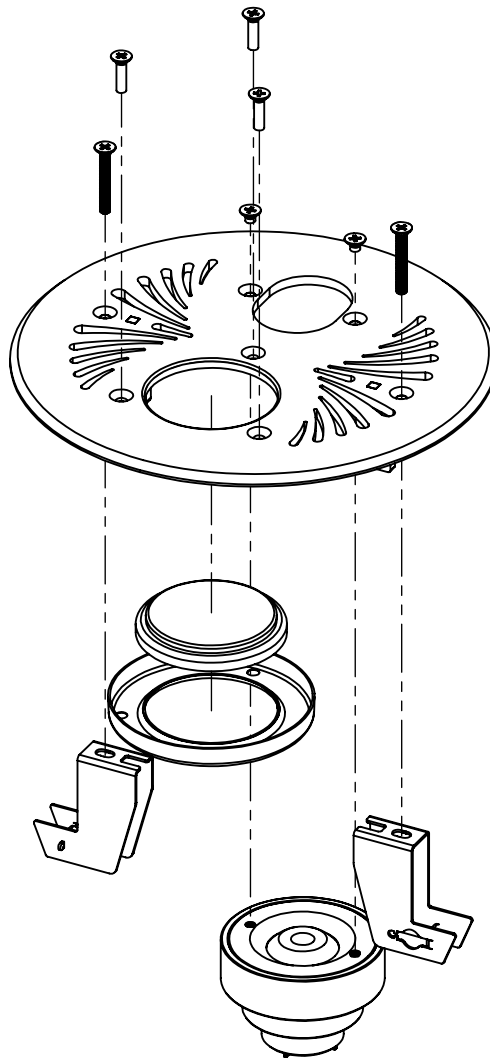

1-2 Identification Codes

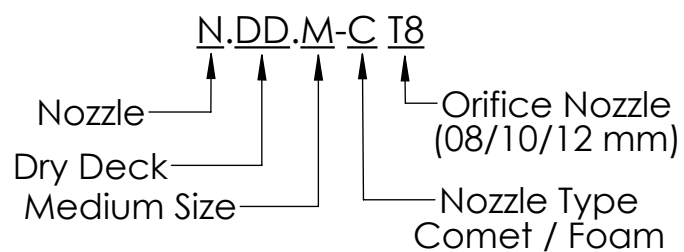

2- Technical details

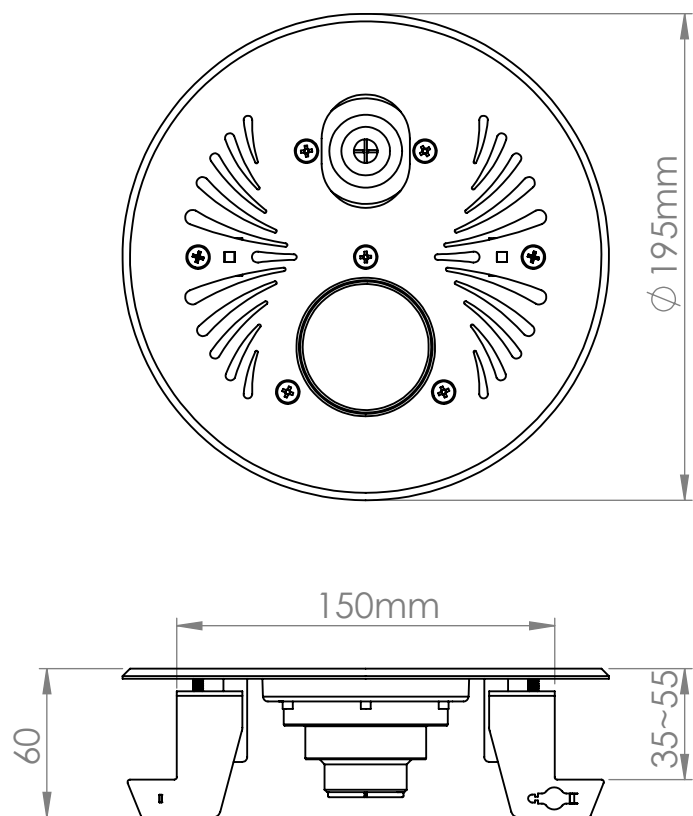

MEDIUM DRYDECK NOZZLE (N.DD.M)			
TYPE	N.DD.M		
	T8	T10	T12
Dimensions HxWxL (mm)	60x195x195		
Orifice nozzle (mm)	08	10	12
Flow (m3/hr)	1~2	1~2.5	1~3
Pressure Drop (bar)	0.3	0.2	0.2
Water connection (inch)	1"		
LED Lighting type	W / RGB		
Power-volt-current	1.5W-24V-1.5A		
Working Temperature	5~35		
Material	Stainless steel.304 / 316		
Weight (kg)	3.0		
Order code	N.DD.M-T8	N.DD.M-T10	N.DD.M-T12



GSO FOUNTAIN COMPANY
www.gsofountain.com