



RING CROWN FOUNTAIN (PF.RC) OPERATING INSTRUCTIONS

Contents


- 1. All models
- 2. Technical detailes
- 3. Equipment diagram
- 4. Install steps
- 5. Maintenance / Cleaning
- 6. Part number


1- All models of PF.RC fountain

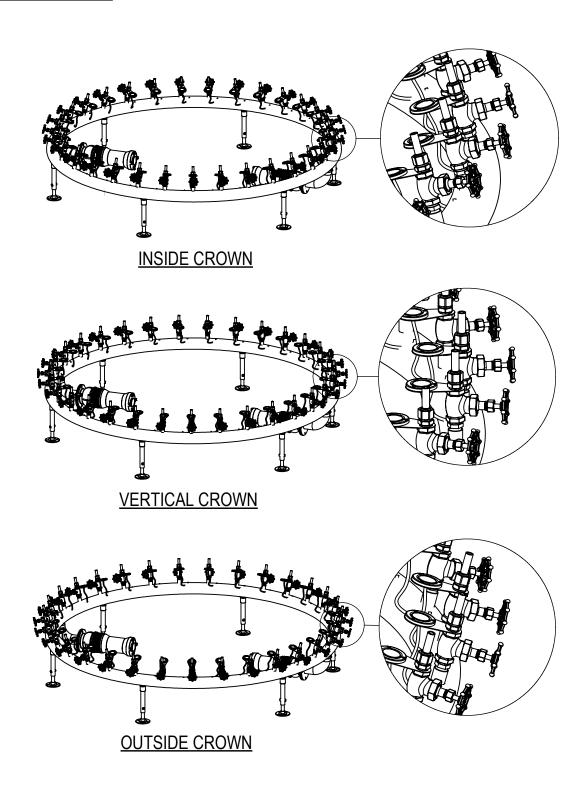

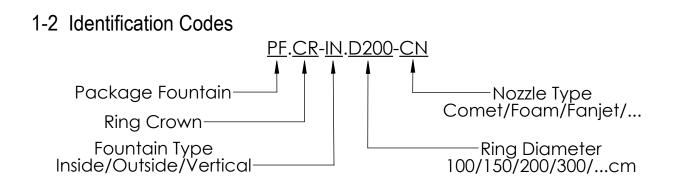

2- Technical detailes

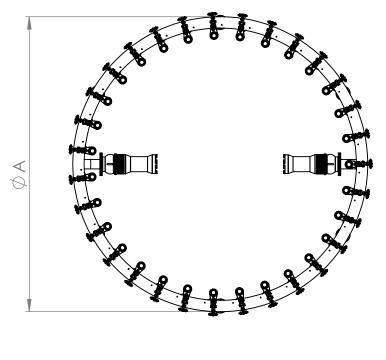



RING CROWN FOUNTAIN				
Discription		INSIDE	OUTSIDE	VERTICAL
Dimensions (cm)	Α	100/150/200/300/400/		
	В	50~100cm		
Nozzle type		Comet/Foam/Fanjet		
Colector size		2"/3"/4"/5"/6"/		
LED lighting type		RGB/W		
Rated voltage		380 VDC		
IP Grade		IP68 (0-0.5m)		
Working temperature		+5 ~ 35 C		
Material		SS / Br		
Weight (pump+accessory)kg		100 <x< td=""></x<>		
Control		DMX / RDM		
DMX channel		5-10 ch		
Configure DMX address		RDM		
Order		PF.RC.IN	PF.RC.OU	PF.RC.VE



GSOFOUNTAIN COMPANY www.gsofountain.com