




Dry Deck Nozzle




Dry Deck Fountain

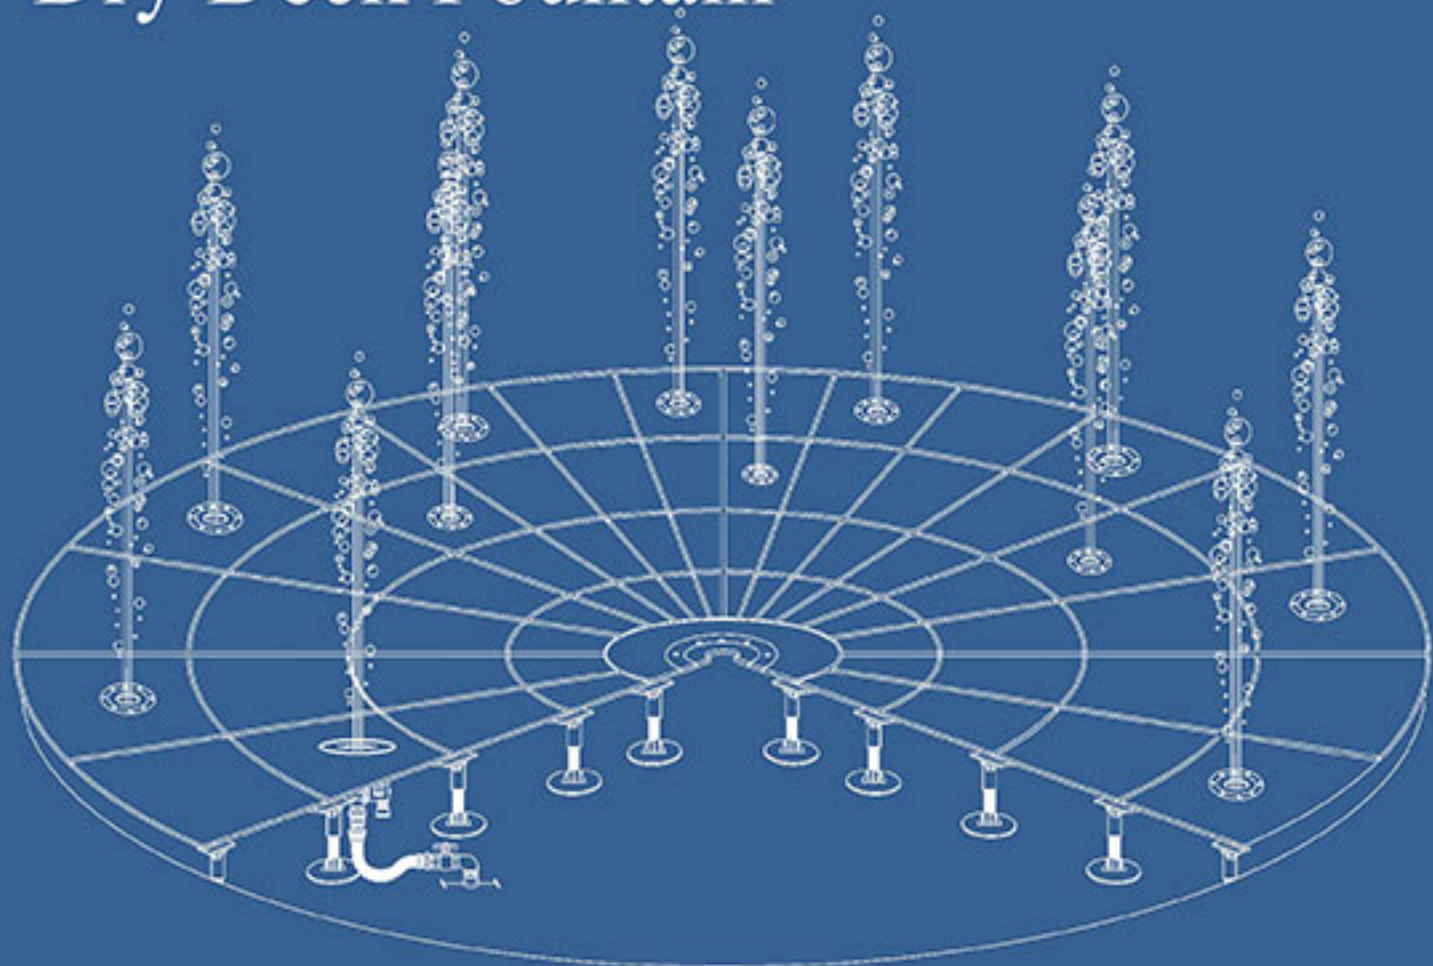

Dry Deck Nozzle

Dry deck nozzle is the best selection for dry fountain and interactive fountains.

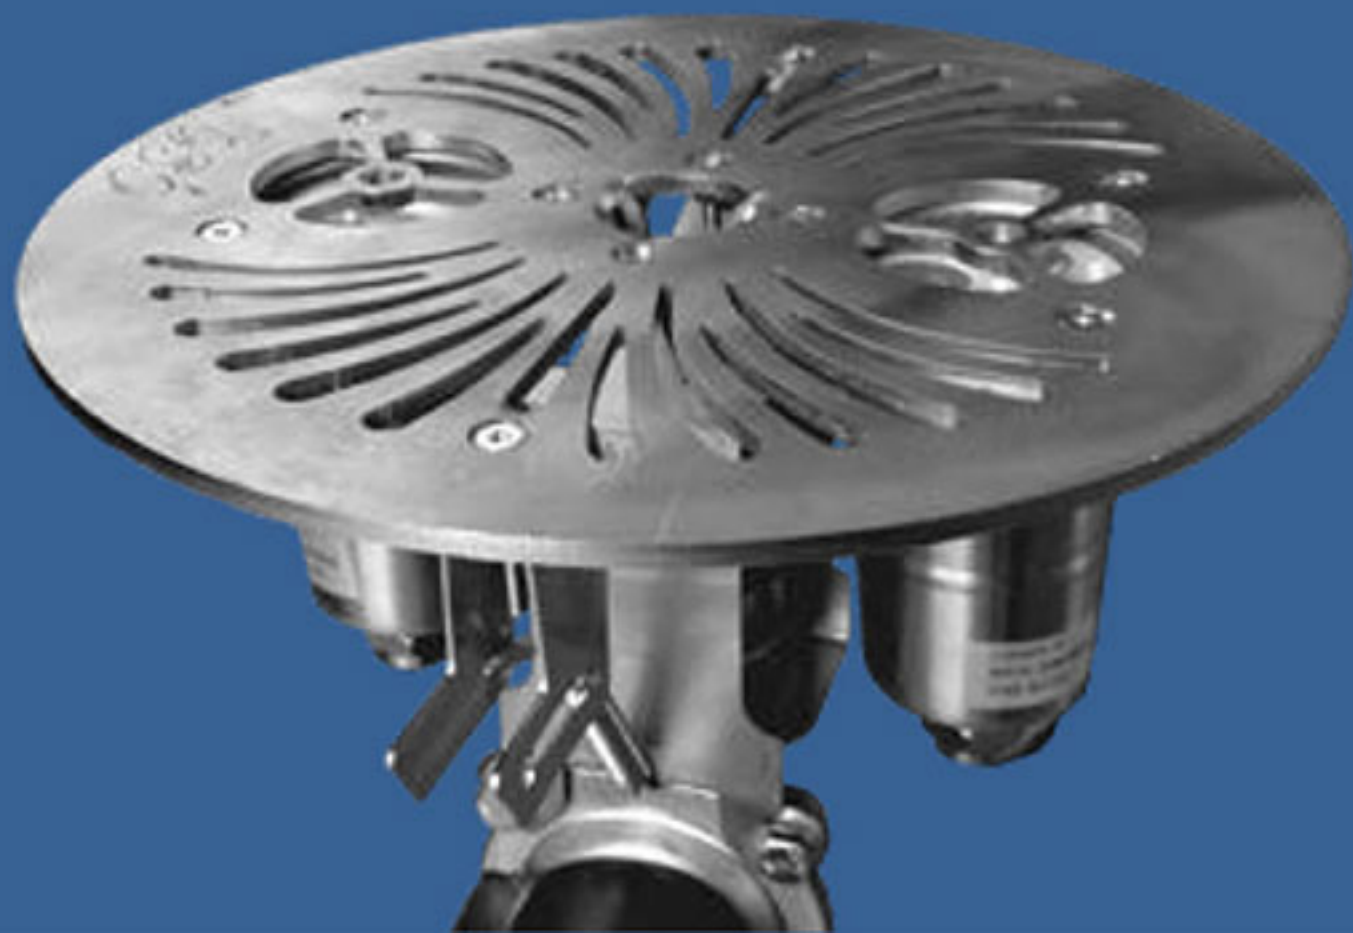

Dry Deck (Comet Nozzle) Square & Round



DD-C-R



DD-C-S

Dry Deck Switch (Comet Nozzle) Square & Round



DDS-C-R



DDS-C-S

Type		Dry Deck Nozzle				Dry Deck Switch Nozzle			
Nozzle		Foam 25-35T							
(Round/Square)		Round		Square		Round		Square	
DIMENSIONS (LxWXH) mm		(200 x 245Ø) mm		(200 x 245 x 245) mm		(300 x 245Ø) mm		(300 x 245 x 245) mm	
Material		Stainless Steel 304		Stainless Steel 304		Stainless Steel 304		Stainless Steel 304	
Weight	[kg]	2.5		3		3.5		4	
LED		Weight	RGB	Weight	RGB	Weight	RGB	Weight	RGB
Order Code		DD-F-R-W	DD-F-R-C	DD-F-S-W	DD-F-S-C	DDS-F-R-W	DDS-F-R-C	DDS-F-R-W	DDS-F-R-C

Dry Deck (Foam Nozzle) Square & Round



DD-F-R



DD-F-S

Dry Deck Switch (Foam Nozzle) Square & Round



DDS-F-R




DDS-F-S

Type		Dry Deck Comet Nozzle				Dry Deck Switch Comet Nozzle			
Nozzle		Comet 25 - 10T&12T&14T							
(Round / Square)		Round		Square		Round		Square	
DIMENSIONS (LxWxH) mm		(160 x 245Ø) mm		(160 x 245 x 245) mm		(260 x 245Ø) mm		(260 x 245 x 245) mm	
Material		Stainless Steel 304		Stainless Steel 304		Stainless Steel 304		Stainless Steel 304	
Weight	[kg]	2.5		3		3.5		4	
LED		Weight	RGB	Weight	RGB	Weight	RGB	Weight	RGB
Order Code		DD-C-R-W	DD-C-R-C	DD-C-S-W	DD-C-S-C	DDS-C-R-W	DDS-C-R-C	DDS-C-R-W	DDS-C-R-C

Calculation


DIMENSIONS (Ø X H)		Dry Deck Comet 10T		Dry Deck Comet 12T		Dry Deck Comet 14T		Dry Deck Foam 1"-32T	
FOUNTAIN HEIGHT		L/min	Bar	L/min	Bar	L/min	Bar	L/min	Bar
0.50	[m]	15.0	0.08	21.7	0.08	29.5	0.08	55.5	0.20
1.00	[m]	21.3	0.15	30.6	0.16	41.7	0.15	79.0	0.30
1.50	[m]	26.1	0.23	37.5	0.23	51.1	0.23	100.0	0.40
2.00	[m]	30.1	0.30	43.3	0.31	59.0	0.30	115.0	0.50
2.50	[m]	33.6	0.38	48.5	0.39	65.9	0.38	125.0	0.63
3.00	[m]	36.9	0.45	53.1	0.47	72.2	0.45		
4.00	[m]	42.6	0.60	61.3	0.62	83.4	0.60		

Detail of Installation

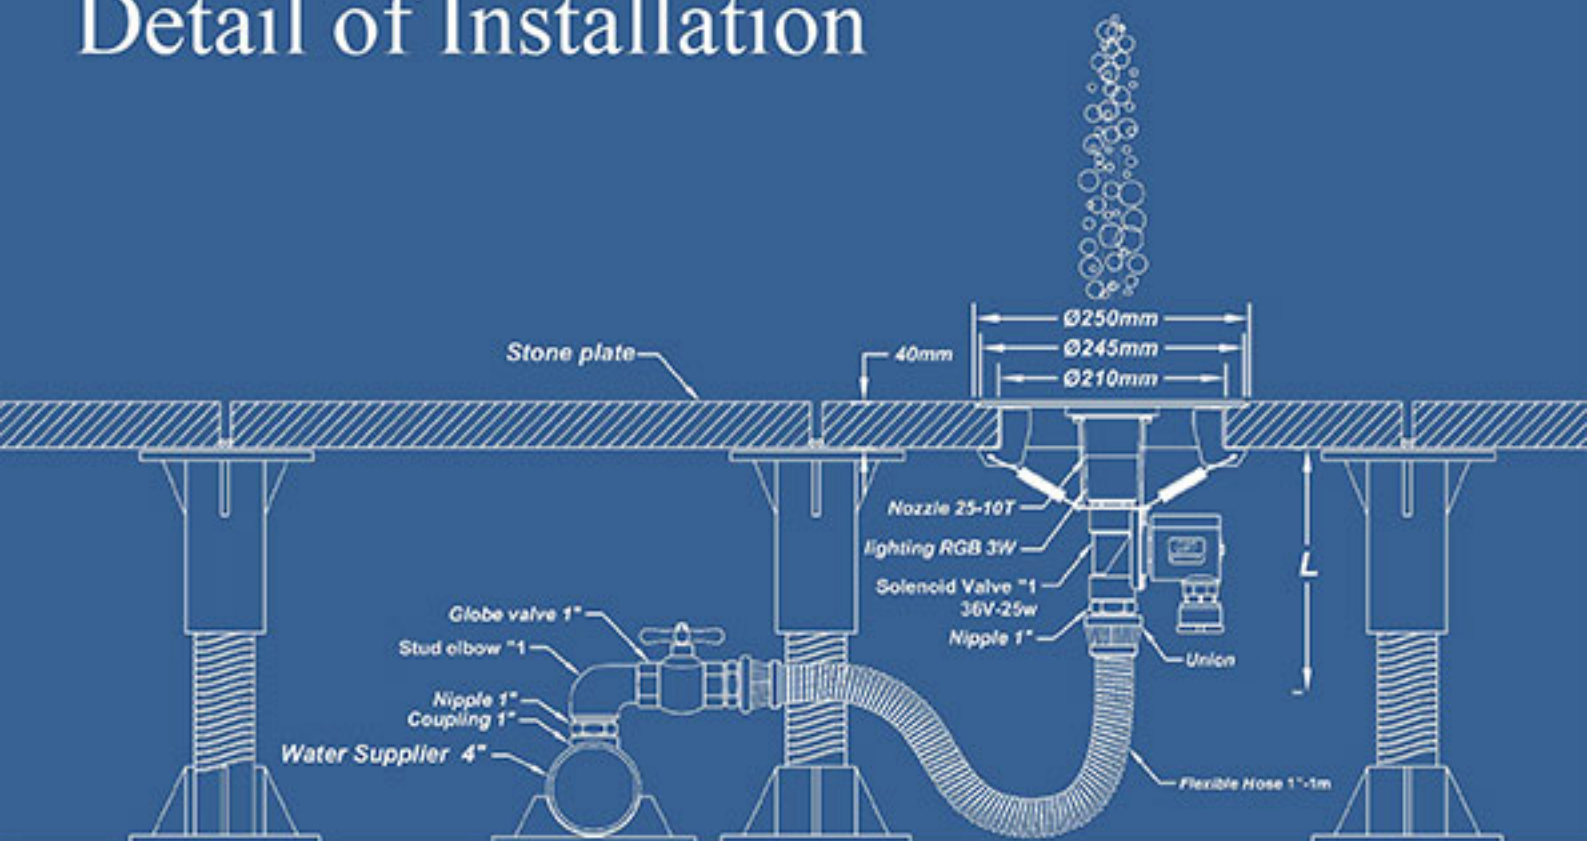

Easy Install

One of this package features is fast and easy installation.

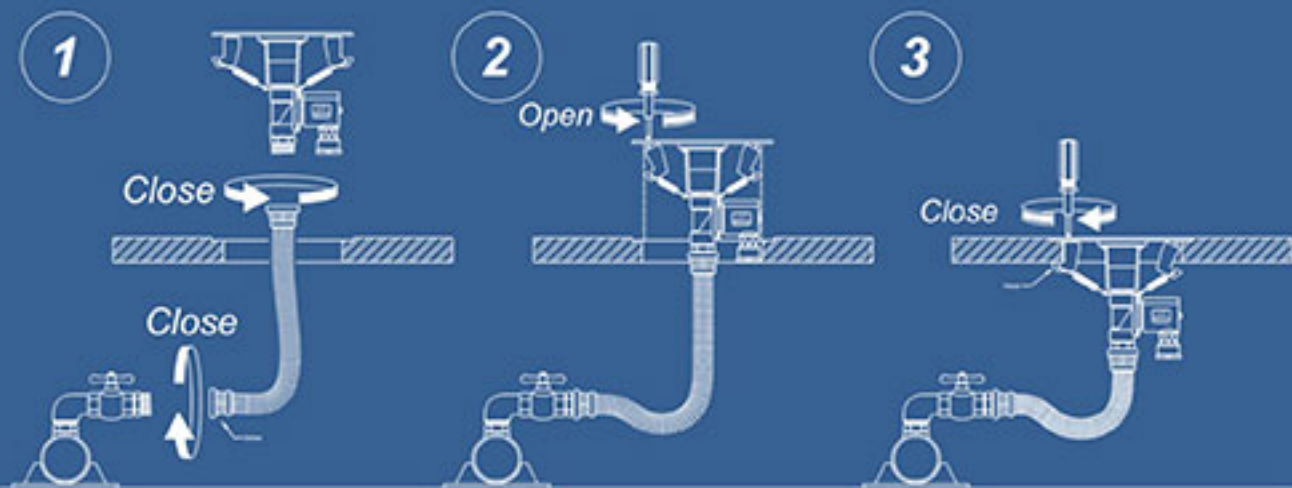



CONTACT US

Tel/Fax: +982166910472
Mob: +98912 924 2670-3

Email: info@gsofountain.com
Web: www.gsofountain.com