


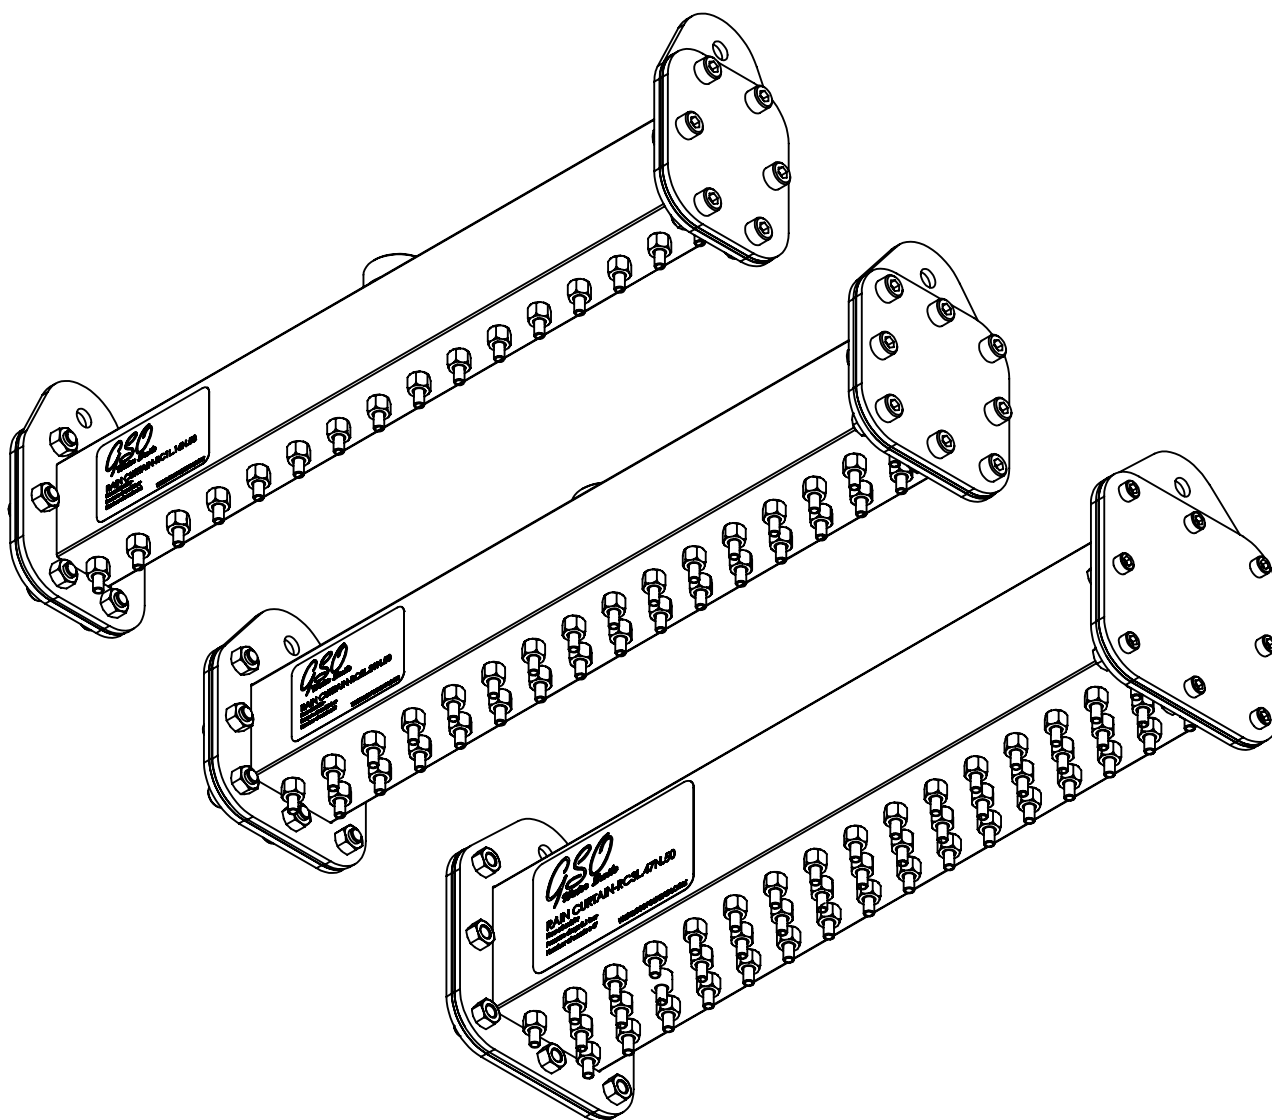


RAIN CURTAIN (FP.RC)

Operating instructions

Contents

1. All models
2. Technical details
3. Install on the wall and ceiling
4. Combine units
5. Installation diagram
6. Maintenance / Cleaning
7. Scope of delivery
8. Part number

1- All Models Of FP.RC

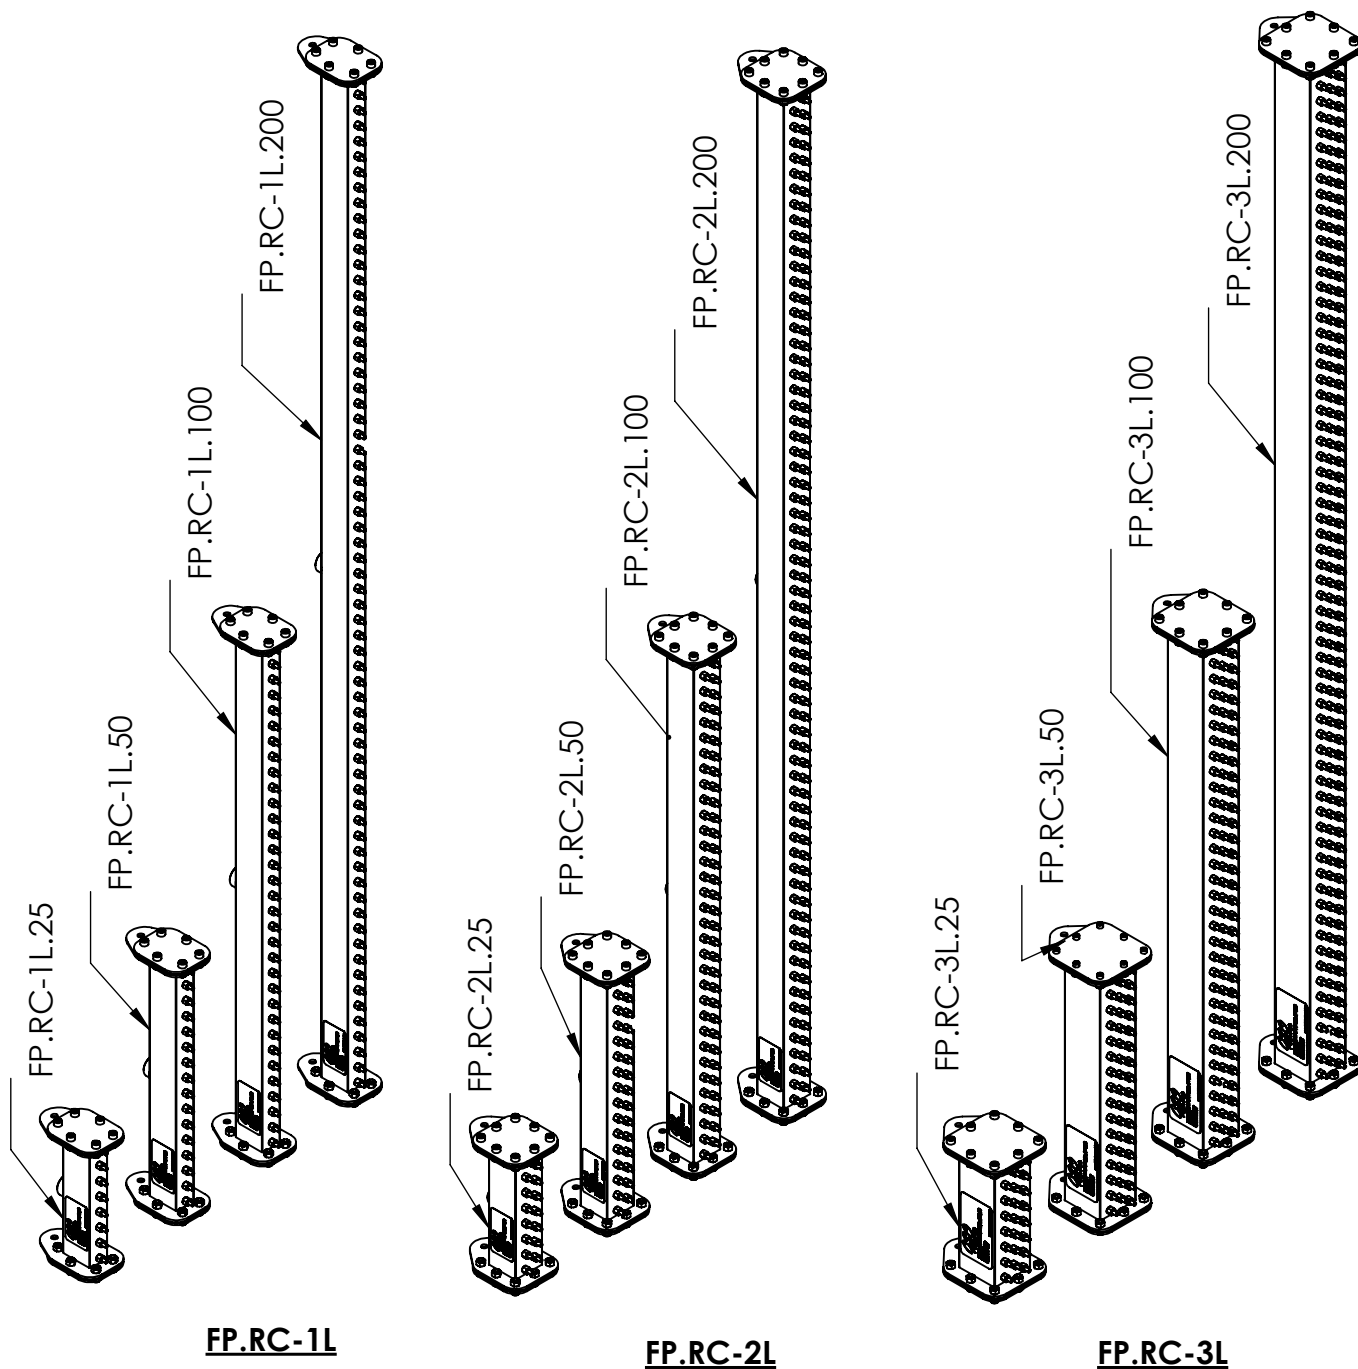

1-2 Identification Codes

FP.RC-1L.025-SS

Fountain Package
Rain Curtains
Number Of Lines 1 / 2 / 3
Length
(25 / 50 / 100 / 200) cm
Stainless Steel

2- Technical Details:

2-1 FP.RC Unit Dimensions:

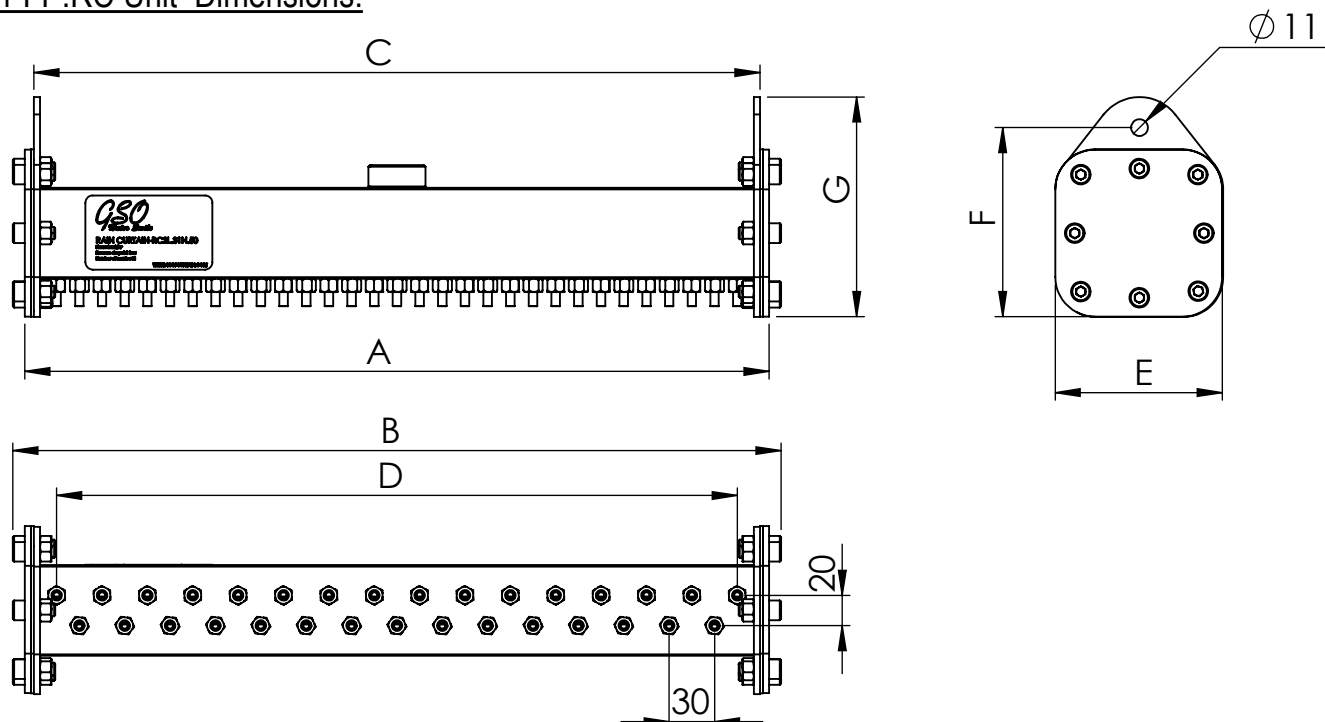


Figure 2-1

TECHNICAL DETAILS: FP.RC UNITS

TYPE		1L				2L				3L			
		25	50	100	200	25	50	100	200	25	50	100	200
Number Of Lines		1 line				2 lines				3 lines			
Number Of Nozzles		8	16	33	66	15	31	65	131	23	47	98	197
Dimensions (mm)	A	250	490	1000	1992	250	490	1000	1992	250	490	1000	1992
	B	270	520	1020	2010	270	520	1020	2010	270	520	1020	2010
	C	240	480	990	1980	240	480	990	1980	240	480	990	1980
	D	210	450	960	1950	210	450	960	1950	210	450	960	1950
	E	95				115				130			
	F	125				125				145			
	G	145				145				165			
Nozzle Diameter (mm)		Ø 4				Ø 4				Ø 4			
Distance between Nozzles (mm)		30				X30 - Y20				X30 - Y20			
Connection Size (inch)		1"	1"	1"	2X1"	1"	1"	1"	2X1"	1"	1"	1"	2X1"
Flow (m3/hr)		0.5	1.0	2.0	4.0	1.0	2.0	4.0	8.0	1.5	3.0	6.0	12.0
Pressure Drop (bar)		0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Material		Stainless steel.304											
Weight (kg)		3.0	4.0	6.0	10.0	3.2	4.5	7.0	12.0	4.2	5.5	8.0	14.0
Order Code		FP.RC-1L.25	FP.RC-1L.50	FP.RC-1L.100	FP.RC-1L.200	FP.RC-2L.25	FP.RC-2L.50	FP.RC-2L.100	FP.RC-2L.200	FP.RC-3L.25	FP.RC-3L.50	FP.RC-3L.100	FP.RC-3L.200



GSO FOUNTAIN COMPANY
www.gsofountain.com